



ARCOBALENO®
PASTA MACHINES


INSTALLATION & START UP MODEL AEX30 ETL

DRY FLOUR ALARM

If you receive the DRY FLOUR alarm:

- **Stop machine and remove the die immediately.** Soak die in water.
Dry flour will clog the die and cause damage if not removed. Operating with a clogged die will void warranty.
- Remove all ingredients from the machine. Empty the machine completely.
- Reassemble with a clean pasta die and start a new batch.
- After cleaning and reassembling the machine, press the Stop button.
- Verify the recipe.
The base recipe for AEX30 is 4,000g Semolina flour and 1,200-1,320g water.
(This recipe is 30-33% hydration.)
Running less than 30% hydration will result in the DRY FLOUR alarm.

If you have any questions, please contact Arcobaleno at 717-394-1402.

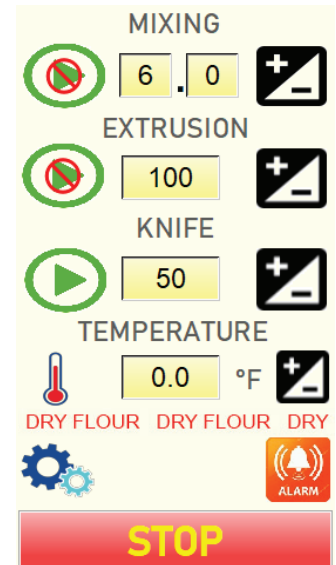

Tools needed to remove pasta die:




- spanner/die wrench



- hammer

While holding the die wrench firmly, tap the arm of the die wrench with the hammer as shown. Use care when using the hammer to avoid damage to the user or the machine.

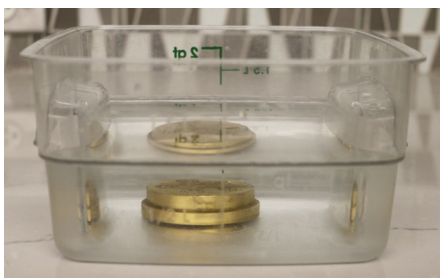

Pasta die must be removed immediately and soaked in water!